

# GSM Antenna


# Ct-GSM11



## Specifications Sheet

GSM Quad Band Antenna with Straight SMA Plug

## Structure Figure

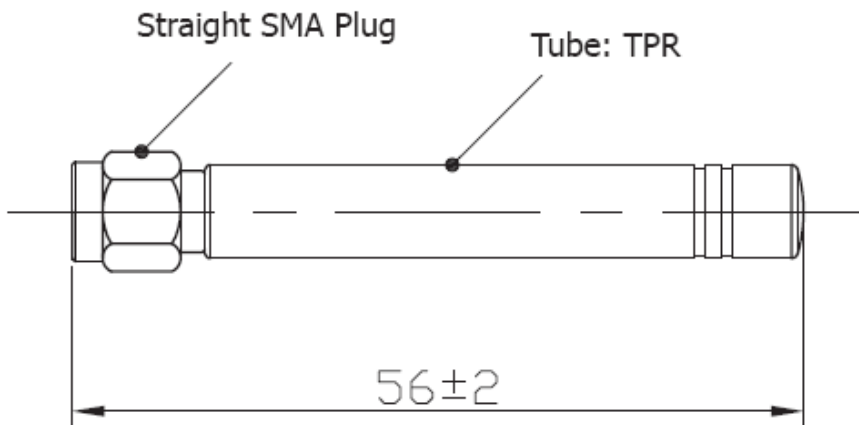

## Mechanical

|                       |                   |
|-----------------------|-------------------|
| Antenna Tube          | TRR               |
| Tube Color            | Black             |
| Operating Temperature | -20°C ~ +60°C     |
| Storage Temperature   | -30°C ~ +75°C     |
| Connector Type        | Straight SMA Plug |
| Connector Plating     | Gold              |

## Electrical

|                 |                       |
|-----------------|-----------------------|
| Frequency Range | 800/900/1800/1900 MHz |
| Impedance       | 5Ω                    |
| VSWR            | 2.0 Max               |
| Gain            | 2.0 dBi               |
| Electrical Wave | 12λ, Dipole           |
| Radiation       | Omni                  |
| Polarization    | Vertical              |

**Test Report**
